


SCHEDULE OF FOOTINGS

FOOTING MARK	SIZE			BOTTOM REINFORCEMENT	
	LENGTH (L)	WIDTH (W)	DEPTH (D)	A	B
F1	5' 3"	4' 9"	15"	Y10 @ 6"	Y10 @ 6"
F2	6' 0"	5' 9"	18"	Y10 @ 5"	Y10 @ 5"
F3	6' 9"	6' 3"	18"	Y10 @ 5"	Y10 @ 5"
F4	7' 0"	6' 9"	24"	Y12 @ 6"	Y12 @ 6"
F5	7' 6"	7' 0"	24"	Y12 @ 6"	Y12 @ 6"

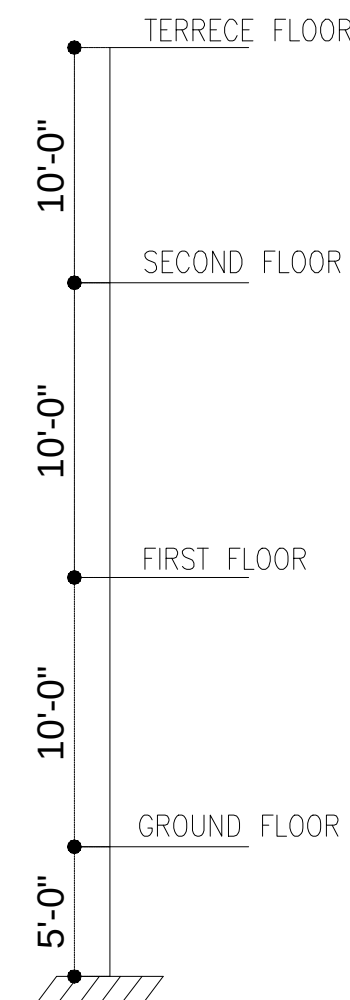

1. LAP LENGTH SHALL BE 50 TIMES DIA OF THE BAR
AND TO BE STAGGERED SUCH THAT NOT MORE THAN
50% OF THE BARS ARE LAPPED AT A SECTION.
2. CLEAR COVER TO THE REINFORCEMENT :
FOOTING/WALL : 25 mm
COLUMNS : 25 mm
SLAB : 20 mm
BEAM : 40 mm
3. DEVELOPMENT LENGTH SHALL BE 50 TIMES THE DIA. OF
THE BAR.
4. STRUCTURE IS DESIGNED FOR G+2 FLOOR

Client :-		
Structural Consultant:-		
Architect:		
Rev.No:-	Date:	
GENERAL NOTES:		
1. DO NOT SCALE FROM THE DRAWINGS. FOLLOW WRITTEN DIMENSIONS ONLY.		
2. ALL DIMENSIONS ARE IN INCHES AND LEVELS IN FEET UNLESS NOTED OTHERWISE, ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE EXECUTION & APPROVED BY THE ENGINEER.		
3. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH OTHER RELEVANT ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL AND CIVIL DRAWINGS AND ALL RELEVANT SECTIONS OF THE SPECIFICATIONS.		
4. EXECUTION OF THE WORKS SHALL BE CARRIED BY QUALIFIED PERSONNEL ONLY. ANY DISCREPANCY IN SITE SHALL BE BROUGHT TO THE NOTICE OF THE CONSULTANTS PRIOR TO THE EXECUTION.		
Dwg by :-	SA	Scale :- AM
Chk by :-	PVS	Sheet Size :-
Issued For :-		
FOR CONSTRUCTION		
Project :-		
RESIDENTIAL BUILDING AT		
Sheet Description :-		
Contents :-		
FOUNDATION DETAILS		
Project North :-	DRWG. NO.: TMPL/04/04/2025/KH/SD-001	
DATE: 07-04-2026	REV: 00	