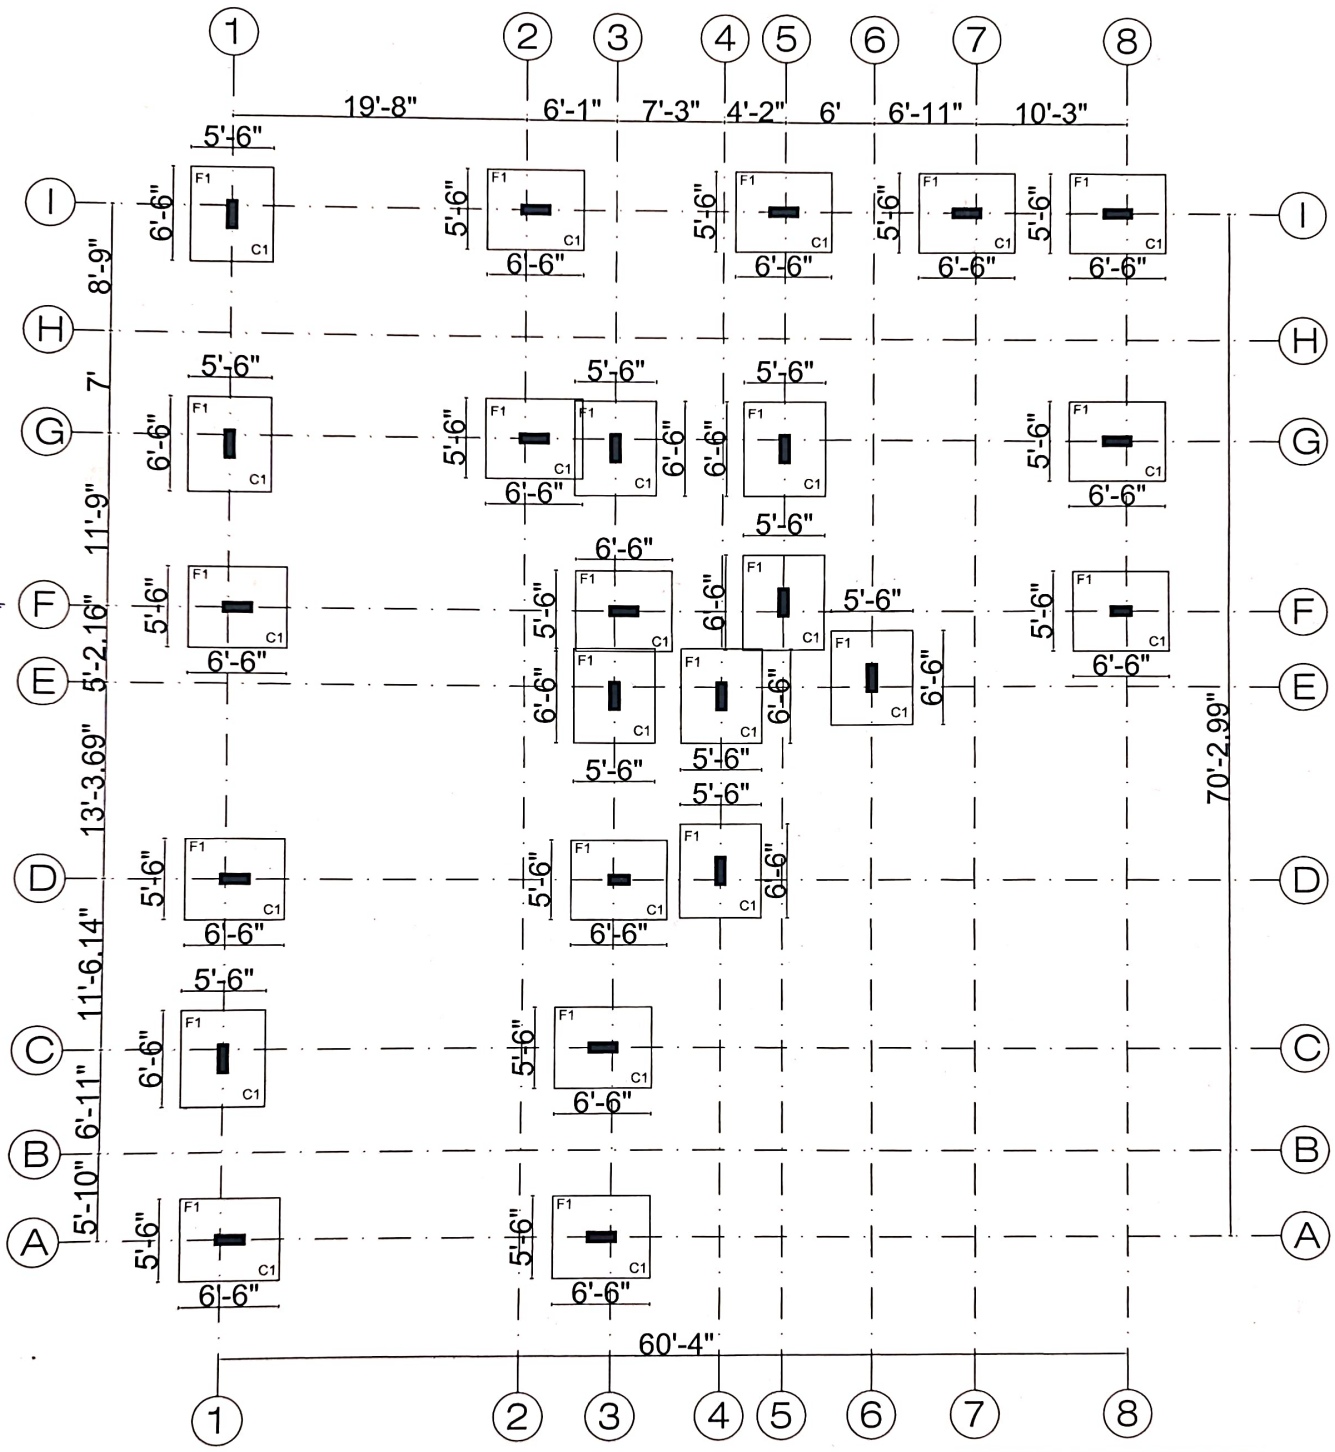

SCHEDULE OF FOOTINGS FOR SBC 95kN/m2								
SL.No.	TYPE	Nos.	EXCAVATION SIZE (LxB)	FOOTING SIZE		FOOTING DEPTH	BOTTOM REINF.	
				L	B	D	PARALLEL TO LENGTH	PARALLEL TO BREADTH
1	F1	24	6'-6"x7'-6"	5'-6"	6'-6"	18"	T12-6" c/c	T12-6" c/c

SCHEDULE OF COLUMN(Car porch)		
TYPE	SECTION	TYPICAL SECTION
C	9"X2'0"	

FOOTING & COLUMN REINFORCEMENT DETAILS